

Datasheet Blasting Plug Mini



Release date : 16-01-2014
Revision date : 18-10-2017

Elskensakker 8, NL-5571 SK
Bergeijk, The Netherlands

Tel +31 497 542527
Fax +31 497 555399
Email info@dhatec.nl
Web www.dhatec.nl

General information

The Blasting Plug Mini provides pipe closure during the external blasting process. The internal pipe surface remains clean and is protected against damage and impact of steel grit.

Application

Always use two Blasting Plugs during the process: one in each of the pipe ends. The Blasting Plugs are fitted before blasting and removed after the blasting process. For removal, a special tool is required.

Features

- ✓ No blasting grit inside the pipe
- ✓ Vent hole included to avoid pipe overpressure
- ✓ Strong clamping
- ✓ Reusable

Material specifications

Plate : Steel S235
Plate Edge : Manganese Chrome (anti abrasive)
Adjustable clamping mechanism : EPDM 50° shore A

Product range : 101,6mm – 355,6mm (4"- 14")
Product code : BPM

Commodity / HS code : 73269098

Additional information

- Application temperature: -40°C / 120°C (-40°F / 248°F)
- Can run through a pre-heating oven and washing cabin
- Removal tools can be purchased with the Blasting Plugs



Fig.1 Blasting Plug mini

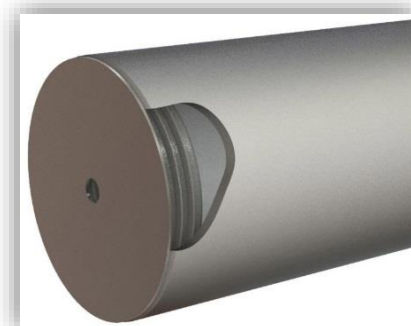


Fig.2 Blasting Plug Mini in pipe



Fig.3 Blasting Plug Mini removal tool