

Datasheet Flexible Pipe Cap



Release date : 10-06-2013
Revision date : 18-10-2017

Elskensakker 8, NL-5571 SK
Bergeijk, The Netherlands

Tel +31 497 542527
Fax +31 497 555399
Email info@dhatec.nl
Web www.dhatec.nl

General information

The Flexible Pipe Cap closes the pipe against the elements. This protects the interior of the pipe.

Application

The Flexible Pipe Cap is placed over the pipe end and clamps itself to the outer pipe surface.

Features

- ✓ Fast and easy fitting and removal
- ✓ High resistance against tearing
- ✓ The pipe can be sealed

Material specifications

Material : Low Density Polyethylene (LDPE)
Hardness : 40° shore D
Elasticity at break : 1600 %
Tension at break : 21 Mpa
Modulus of elasticity : 60 Mpa
Material thickness : approx. 2mm (0.08")

Product range : 50,8mm – 1.625,6mm (2" – 64")
Product code : FC

Commodity / HS code : 39235090

Additional information

- Application temperature: -40°C / 60°C (-40°F / 140°F)
- UV-resistance: For outdoor use: 0,5-2 years
- Application time: 1 – 2 minutes per pipe end
- Available in a wide range of standard and non-standard sizes



Fig.1 Flexible Pipe Cap

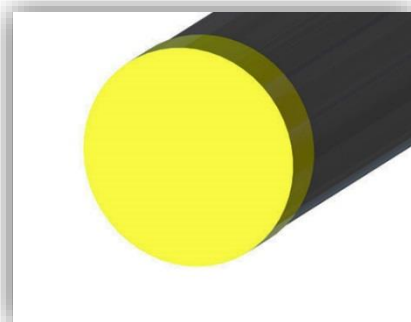


Fig.2 Pipe with Flexible Pipe Cap