

Datasheet V-Sup



Release date : 27-03-2018
Revision date : 03-10-2018

Elskensakker 8, NL-5571 SK
Bergeijk, The Netherlands

Tel +31 497 542527
Fax +31 497 555399
Email info@dhatec.nl
Web www.dhatec.nl

General information

V-Sup is a system of beams to build a stack. The stack can be used to support pipes during pipeline construction activities. A V-Sup stack consists of several Stackable Beams (Fig.2) and one V-Beam (Fig.3).

The V-Sup stack can also be used for other temporary support applications (e.g. in a factory or storage area).

Application

The stackable beams are meant to create the desired working height. Three Stackable Beams per layer are used with a maximum of 10 layers (approx. 120 cm high). The top layer exists out of two Stackable Beams with one V-Beam in between. The V-Beam will keep the pipe in place.

Features

- ✓ Easy height adjustment
- ✓ Short assembly time
- ✓ Solid support by interlocking beams
- ✓ V-Beam suitable for stringing

Material specifications

- PE-compound, color black
- Hardness: 92° shore A
- Frictional resistance factor: 0,3
- UV-stabilized
- Application temperature (ambient): -35°C / + 45°C (-31°F / 113°F)

Pipe diameter range : up to 2032mm (80")
Product code : VSUP

Commodity / HS code : 39269097

Additional information

- Stackable Beam : 13,0kg; 1200mm (47.25") length
- V-Beam : 16,3kg; 1200mm (47.25") length
- User values:
 - Maximum load (static): 16.000 kg per stack
 - Maximum load (dynamic): 12.000 kg per stack

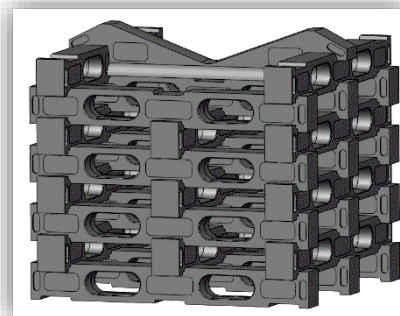


Fig.1 V-Sup stack; 8 layers




Fig.2 Stackable Beam



Fig.3 V-Beam

